

**CU****Gestanzte Klemmkabelschuhe**


nach DIN 46227

- ▶ Werkstoff: E-Cu DIN 40500
- ▶ Oberfläche: blankgebeizt
- ▶ Schrauben: DIN 84/DIN 933 Stahl, verzinkt

**Punched copper cable lug**


acc. to DIN 46227

- ▶ Material: E-Cu DIN 40500
- ▶ Surface: bright
- ▶ Screws: DIN 84/DIN 933 steel, galvanized

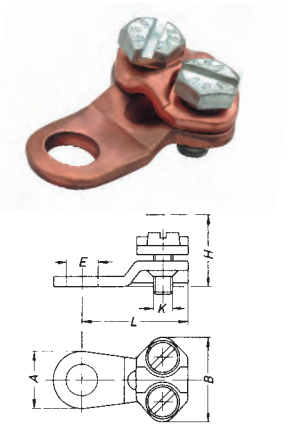**mit 2 Stahlschrauben  
with 2 steelscrews**

mm <sup>2</sup> sqmm	E Ø	L	A	B	H	K	Gewicht weight	Kat.-Nr. cat.-no.
6 - 10	6,4	24	11	18	10	M4	0,97	15000 - 00
10 - 16	6,4	25	11	21	14	M5	1,40	15010 - 00
10 - 16	8,4	28	15	21	14	M5	1,76	15020 - 00
16 - 25	8,4	31	15	26	16	M6	2,90	15030 - 00
25 - 35	8,4	35	15	27	19	M6	3,50	15040 - 00

Auch in verzinnter Ausführung lieferbar

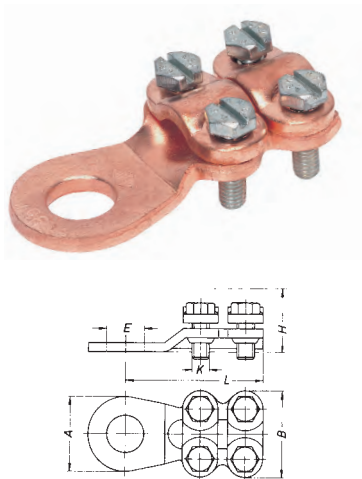**mit 4 Stahlschrauben  
with 4 steelscrews**

mm <sup>2</sup> sqmm	E Ø	L	A	B	H	K	Gewicht weight	Kat.-Nr. cat.-no.
16 - 25	8,4	36	15	24	16	M5	3,51	15100 - 00
16 - 25	10,5	39	21	24	16	M5	3,65	15110 - 00
25 - 35	8,4	38	16	24	16	M5	3,60	15120 - 00
25 - 35	10,5	41	21	25	16	M5	3,80	15130 - 00
25 - 35	13,0	41	21	24	16	M5	3,80	15140 - 00
35 - 50	10,5	46	20	28	19	M5	5,60	15150 - 00
35 - 50	13,0	47	24	28	19	M5	5,70	15160 - 00
50 - 70	10,5	51	23	33	19	M6	9,30	15170 - 00
50 - 70	13,0	52	29	33	19	M6	9,60	15180 - 00
70 - 95	10,5	57	23	35	25	M6	11,90	15190 - 00
70 - 95	13,0	57	31	35	25	M6	12,05	15200 - 00
95 - 120	13,0	60	29	42	27	M7	17,50	15210 - 00
120 - 150	17,0	65	30	42	29	M8	19,70	15213 - 00
150 - 240	17,0	70	38	53	32	M8	30,30	15220 - 00

Auch in verzinnter Ausführung lieferbar

Alle Maßangaben in mm, Gewicht ca. kg pro 100 Stk.  
all sizes in mm, weight approx. in kg per 100 pcs

**CU****Gestanzte Klemmkabelschuhe**

nach DIN 46227

- ▶ Werkstoff: E-Cu DIN 40500
- ▶ Oberfläche: blankgebeizt
- ▶ Schrauben: DIN 84/DIN 933 Bronze, F60

**Punched copper cable lug**


acc. to DIN 46227

- ▶ Material: E-Cu DIN 40500
- ▶ Surface: bright
- ▶ Screws: DIN 84/DIN 933 Bronze, F60

**mit 2 Bronzeschrauben  
with 2 bronzescrews**


mm <sup>2</sup> sqmm	E Ø	L	A	B	H	K	Gewicht weight	Kat.-Nr. cat.-no.
6 - 10	6,4	24	11	18	10	M4	0,90	15500 - 00
10 - 16	6,4	25	11	21	14	M5	1,65	15510 - 10
10 - 16	8,4	28	15	21	14	M5	1,80	15520 - 00
16 - 25	8,4	31	15	26	16	M6	3,05	15530 - 00
25 - 35	8,4	35	15	27	19	M6	3,60	15540 - 00

Auch in verzintter Ausführung lieferbar

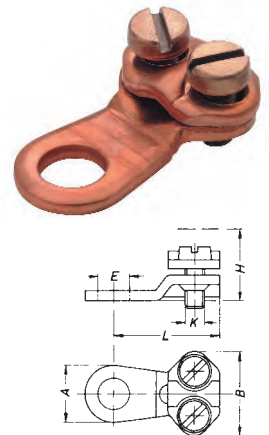**mit 4 Bronzeschrauben  
with 4 bronzescrews**

mm <sup>2</sup> sqmm	E Ø	L	A	B	H	K	Gewicht weight	Kat.-Nr. cat.-no.
16 - 25	8,4	37	15	24	16	M5	3,60	15600 - 00
16 - 25	10,5	39	21	24	16	M5	3,85	15610 - 00
25 - 35	8,4	39	16	24	16	M5	4,15	15620 - 00
25 - 35	10,5	41	21	25	16	M5	4,15	15630 - 00
25 - 35	13,0	41	21	25	16	M5	4,20	15640 - 00
35 - 50	10,5	46	20	28	19	M5	5,90	15650 - 00
35 - 50	13,0	47	24	28	19	M5	5,90	15660 - 00
50 - 70	10,5	51	23	33	19	M6	9,70	15670 - 00
50 - 70	13,0	52	29	33	19	M6	9,50	15680 - 00
70 - 95	10,5	57	23	35	25	M6	12,50	15690 - 00
70 - 95	13,0	57	31	35	25	M6	13,00	15700 - 00
95 - 120	13,0	60	29	42	27	M7	18,50	15710 - 00
120 - 150	17,0	65	31	42	29	M8	20,70	15713 - 00
150 - 240	17,0	70	38	53	32	M8	31,50	15720 - 00

Auch in verzintter Ausführung lieferbar

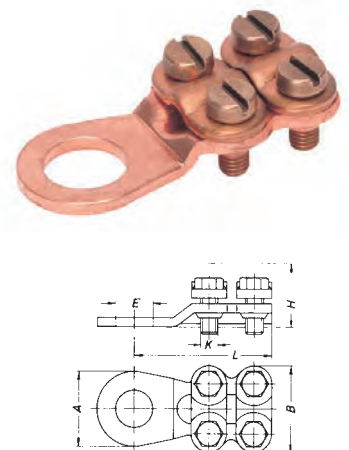

Alle Maßangaben in mm, Gewicht ca. kg pro 100 Stk.  
all sizes in mm, weight approx. in kg per 100 pcs

**CU****Gestanzte Quetschkabelschuhe**


DIN 46234

- ▶ Werkstoff: E-Cu DIN 40500
- ▶ Oberfläche: verzinkt


**Stamped copper compression lug**

DIN 46234

- ▶ Material: E-Cu DIN 40500
- ▶ Surface: tinned



Form A



Form C

Nenngröße rated quantity		L	A	D Ø	Gewicht weight	Katalog-Nummern cat.-no.		
mm <sup>2</sup> sqmm	Flanschloch palm hole					Form C	Form A	
1	3	11	6	1,6		40700 - 00	40000 - 00	
	4	12	8			40710 - 00	40010 - 00	
	5	13	10			40720 - 00	40020 - 00	
2,5	3	11	6	2,3		40730 - 00	40040 - 00	
	4	12	8			40740 - 00	40050 - 00	
	5	15	10			40750 - 00	40060 - 00	
	6	16	11			40755 - 00	40070 - 00	
	8	17	14			-	40080 - 00	
6	4	16	8	3,6		40760 - 00	40125 - 00	
	5	15	10			40770 - 00	40130 - 00	
	6	16	11			40780 - 00	40140 - 00	
	8	19	14			40790 - 00	40150 - 00	
	10	21	18			-	40160 - 00	
10	6	17	11	4,5	0,250	40800 - 00	40190 - 00	
	8	20	14			0,300	-	40200 - 00
	10	21	18			0,360	40820 - 00	40210 - 00
	12	23	22			0,440	40830 - 00	40220 - 00
16	6	20	11	5,8	0,380		40230 - 00	
	8	22	14			0,430		40240 - 00
	10	24	18			0,540		40250 - 00
	12	26	22			0,600		40260 - 00
25	6	25	12	7,5	0,710		40270 - 00	
	8	25	16			0,780		40280 - 00
	10	26	18			0,840		40290 - 00
	12	31	22			1,010		40300 - 00
35	6	26	15	9	0,990		40325 - 00	
	8	26	16			0,950		40330 - 00
	10	27	18			1,080		40340 - 00
	12	31	22			1,210		40350 - 00

Alle Maßangaben in mm, Gewicht ca. kg pro 100 Stk.  
all sizes in mm, weight approx. in kg per 100 pcs

**CU****Gestanzte Quetschkabelschuhe**

DIN 46234


- ▶ Werkstoff: E-Cu DIN 40500
- ▶ Oberfläche: verzinkt

**Stamped copper compression lug**


DIN 46234

- ▶ Material: E-Cu DIN 40500
- ▶ Surface: tinned

Nenngröße rated quantity		L	A	D Ø	Gewicht weight	Katalog-Nummern cat.-no.	
mm <sup>2</sup> sqmm	Flanscloch palm hole					Form C	Form A
50	8	34	18	11	1,770		40370 - 00
	10	34	18		1,740		40380 - 00
	12	36	22		1,830		40390 - 00
70	8	38	22	13	2,650		40405 - 00
	10	38	22		2,600		40410 - 00
	12	38	22		2,555		40420 - 00
95	10	42	24	15	4,100		40435 - 00
	12	42	24		4,000		40440 - 00
120	12	44	24	16,5	5,700		40460 - 00
	16	48	28		6,100		40470 - 00
150	10	50	30	19,0	7,900		40479 - 00
	12	50	30		7,600		40480 - 00
	16	50	30		7,500		40490 - 00
185	12	50	36	21,0	10,800		40499 - 00
	16	50	36		10,200		40500 - 00
240	12	56	38	23,5	14,700		40520 - 00
	16	56	38		14,300		40530 - 00



Form A



Form C

Alle Maßangaben in mm, Gewicht ca. kg pro 100 Stk.  
all sizes in mm, weight approx. in kg per 100 pcs

## CU

## Rohr-Kerb-Kabelschuhe

## Normalausführung

- ▶ Werkstoff: E-Cu DIN 40500
- ▶ Oberfläche: verzinkt

## Tubular copper compression lug

## Standard type

- ▶ Material: E-Cu DIN 40500
- ▶ Surface: tinned




z.B. 41500 - 00 = VZ.



z.B. 41500 - 05 = BLK. / SL.



z.B. 41500 - 06 = VZ. / SL.



Nenngröße/rated quantity			L	A	D Ø	Gewicht weight	Kat.-Nr. cat.-no.
mm <sup>2</sup> /sqmm		Flanschloch palm hole					
mehr- drähtig multiwire	viel- u. fein- drähtig fine-strand						
0,5 - 1,5		3	12,50	7,0	2,0	0,07	41500 - 00
		4	13,00	7,0		0,08	41510 - 00
		5	15,50	9,5		0,14	41520 - 00
		6	16,00	9,0		0,10	41530 - 00
1,5 - 2,5		4	13,50	8,0	2,5	0,12	41540 - 00
		5	14,00	8,5		0,13	41550 - 00
		6	16,00	9,5		0,16	41560 - 00
		8	20,00	13,0		0,19	41570 - 00
4		4	17,00	8,5	3,0	0,21	41580 - 00
		5	17,50	9,5		0,21	41590 - 00
		6	18,50	10,0		0,23	41600 - 00
		6	18,50	9,5		0,30	41660 - 00
6		5	19,50	9,5	4,0	0,32	41670 - 00
		6	21,50	11,0		0,34	41680 - 00
		8	22,00	14,0		0,35	41690 - 00
		10	25,00	17,0		0,60	41700 - 00
10		5	22,50	10,5	5,0	0,39	41710 - 00
		6	22,50	12,0		0,41	41720 - 00
		8	23,00	15,0		0,44	41730 - 00
		10	27,50	18,0		0,65	41740 - 00
16	10f	5	23,00	12,0	5,5	0,63	41745 - 00
		6	24,50	12,0		0,61	41750 - 00
		8	25,50	15,0		0,60	41760 - 00
		10	29,50	17,5		0,70	41770 - 00
25	16	12	33,50	19,5	7,0	1,00	41780 - 00
		5	27,50	14,0		1,20	41785 - 00
		6	27,50	14,0		1,11	41790 - 00
		8	29,50	15,0		1,19	41800 - 00
35	25	10	32,00	18,0	8,5	1,28	41810 - 00
		12	34,50	21,0		1,30	41820 - 00
		6	33,0	17		1,92	41825 - 00
		8	33,0	17		1,99	41830 - 00
		10	35,5	19		1,90	41840 - 00
		12	37,5	23		2,10	41850 - 00
		16	39,0	28		2,20	41860 - 00

Alle Maßangaben in mm, Gewicht ca. kg pro 100 Stk.  
all sizes in mm, weight approx. in kg per 100 pcs

## CU

## Rohr-Kerb-Kabelschuhe

## Normalausführung

- ▶ Werkstoff: E-Cu DIN 40500
- ▶ Oberfläche: verzinkt

## Tubular copper compression lug

## Standard type

- ▶ Material: E-Cu DIN 40500
- ▶ Surface: tinned

Nenngröße/rated quantity			L	A	D Ø	Gewicht weight	Kat.-Nr. cat.-no.
mm <sup>2</sup> /sqmm		Flanschloch palm hole					
mehr- drähtig multiwire	viel- u. fein- drähtig fine-strand						
50	35	6	37,5	20	10,0	2,90	41865 - 00
		8	39,5	20		3,00	41870 - 00
		10	39,0	21		2,90	41880 - 00
		12	41,5	23		3,20	41890 - 00
		16	46,5	30		3,60	41900 - 00
70	50	8	42,5	24	12,0	3,90	41905 - 00
		10	44,5	24		4,10	41910 - 00
		12	46,5	24		4,20	41920 - 00
		16	49,5	28		4,40	41630 - 00
95	70	8	46,0	25	13,5	5,60	41935 - 00
		10	46,0	25		5,50	41940 - 00
		12	49,5	25		5,80	41950 - 00
		16	53,0	30		6,00	41960 - 00
120	95	10	50,0	28	15,0	6,77	42560 - 00
		12	52,0	28		6,64	42570 - 00
		16	52,0	30		6,50	42580 - 00
		20	61,0	36		7,40	42590 - 00
		150	120	10		60,0	31
185	150	12	58,0	31	19,0	8,10	42610 - 00
		16	60,5	31		8,20	42620 - 00
		20	67,5	36		8,90	42630 - 00
		10	61,5	35		12,00	42635 - 00
		12	63,5	35		12,30	42640 - 00
240	185	16	64,0	35	21,0	11,40	42650 - 00
		20	69,0	39		11,70	42660 - 00
		12	72,0	38		15,20	42670 - 00
		16				14,90	42680 - 00
		20				14,90	42690 - 00
300	240	12	87,0	43	23,5	24,30	42700 - 00
		16				23,90	42710 - 00
		20				23,10	42720 - 00
400	300	12	90,0	49	27,0	32,90	42730 - 00
		16				32,90	42740 - 00
		20				32,30	42750 - 00
500	400	16	90,0	50			42760 - 00
		20					42770 - 00
		16					42780 - 00
630	500	20					42790 - 00




z.B. 41865 - 00 = VZ.



z.B. 41865 - 05 = BLK. / SL.



z.B. 41865 - 06 = VZ. / SL.



Alle Maßangaben in mm, Gewicht ca. kg pro 100 Stk.  
all sizes in mm, weight approx. in kg per 100 pcs

**CU**


**Rohr-Kerb-Kabelschuhe**

- Normalausführung  
 ▶ Werkstoff: E-Cu DIN 40500  
 ▶ Oberfläche: verzinkt

**Tubular copper compression lug**

- Standard type  
 ▶ Material: E-Cu DIN 40500  
 ▶ Surface: tinned

**abgewinkelt 45°  
angle type 45°**

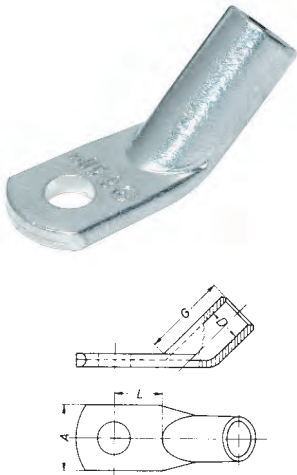

Nenngröße/rated quantity			L	A	D Ø	G	Gewicht weight	Kat.-Nr. cat.-no.
mm <sup>2</sup> /sqmm		Flanschloch palm hole						
mehr-drähtig multiwire	viel- u. feindrähtig fine-strand							
25	16	6	11,5	14,0	7,0	21,0	1,30	43000 - 00
		8	14,5	16,0				
35	25	8	13,0	17,0	8,5	23,0	1,50	43010 - 00
		10	14,0	19,0				
50	35	8	13,0	20,0	10,0	29,0	2,20	43020 - 00
		10	15,5	20,0				
70	50	10	16,5	23,0	12,0	33,0	3,37	43030 - 00
		12	18,0	36,0				
95	70	10	16,5	26,0	13,5	36,5	3,10	43040 - 00
		12	18,0	39,0				
120	95	10	15,0	27,5	15,0	45,0	5,30	43050 - 00
		12	17,0	29,0				
							6,60	43060 - 00
							5,60	43070 - 00
							6,60	43080 - 00
							6,60	43090 - 00
							8,10	43100 - 00
							11,40	43110 - 00

auch in blank erhältlich / in bright possible

**abgewinkelt 90°  
angle type 90°**



Nenngröße/rated quantity			L	A	D Ø	Gewicht weight	Kat.-Nr. cat.-no.
mm <sup>2</sup> /sqmm		Flanschloch palm hole					
mehr-drähtig multiwire	viel- u. feindrähtig fine-strand						
25	16	6	12,0	14	7,0	1,40	43700 - 00
		8	13,5	16			
35	25	8	13,5	17	8,5	2,25	43710 - 00
		10	17,5	19			
50	35	8	13,5	20	10,0	3,30	43720 - 00
		10	17,5	20			
70	50	10	17,0	23	12,0	5,20	43730 - 00
		12	16,5	23			
95	70	10	17,0	25	13,5	6,10	43740 - 00
		12	19,5	26			
* 120	95	10	17,5	28	15,0	7,45	43750 - 00
		12	19,0	28			
150	120	10	17,0	31	16,5	8,40	43760 - 00
		12	18,0				
		14	20,0				
		16	24,5	34,5			
185	150	16	22,0	35	19,0	11,80	43770 - 00
		12	23,0	42			
240	185	16	22,0		21,0	16,00	43780 - 00
		16	22,0				
300	240	16	32,0	47	23,5	23,60	43790 - 00
		20	26,0				
						8,60	43800 - 00
						8,70	43810 - 00
						15,10	43820 - 00
						8,60	43825 - 00
						8,70	43827 - 00
						15,10	43830 - 00
						11,80	43840 - 00
						16,00	43845 - 00
						34,20	43850 - 00
						23,60	43870 - 00
						22,70	43880 - 00

Alle Maßangaben in mm, Gewicht ca. kg pro 100 Stk.  
 all sizes in mm, weight approx. in kg per 100 pcs



**CU****Rohr-Kerb-Kabelschuhe**

für feindrähtige Leiter


- ▶ Werkstoff: E-Cu DIN 40500
- ▶ Oberfläche: verzinkt

**Tubular copper compression lug**

for flexible cable

- ▶ Material: E-Cu DIN 40500
- ▶ Surface: tinned

Nenngröße/rated quantity		Flanschloch palm hole	L	A	D Ø		Gewicht weight	Kat.-Nr. cat.-no.
mm <sup>2</sup>								
feindrähtige Leiter fine-strand								
10		5	27,0	12,00	5,5		0,72	41200 - 10
		6	27,0	12,00		0,71	41200 - 20	
		8	29,0	16,00		0,77	41200 - 30	
		10	31,0	16,00		0,82	41200 - 40	
		16	30,0	13,00		6,6	1,10	41201 - 10
16		6	30,0	13,00	1,07	41201 - 20		
		8	32,0	16,00	1,21	41201 - 30		
		10	34,0	17,00	1,28	41201 - 40		
		12	35,0	19,00	1,28	41201 - 50		
		25	32,0	15,00	7,9	1,52	41202 - 10	
25		6	32,0	15,00	1,50	41202 - 20		
		8	34,0	17,00	1,61	41202 - 30		
		10	37,0	17,00	1,71	41202 - 40		
		12	38,0	19,00	1,74	41202 - 50		
		35	35,0	17,00	9,2	1,91	41203 - 10	
35		8	37,0	18,00	2,08	41203 - 20		
		10	40,0	18,00	2,24	41203 - 30		
		12	41,0	19,00	2,22	41203 - 40		
		14	41,0	21,00	2,41	41203 - 50		
		50	41,0	21,00	11,0	3,54	41204 - 10	
50		8	41,0	21,00	3,44	41204 - 20		
		10	43,0	21,00	3,64	41204 - 30		
		12	46,0	21,00	3,73	41204 - 40		
		16	50,0	28,00	4,02	41204 - 60		
		70	46,0	25,00	13,0	4,46	41205 - 10	
70		10	48,0	25,00	4,62	41205 - 20		
		12	50,0	25,00	4,71	41205 - 30		
		16	54,0	25,00	5,85	41205 - 50		
		95	8	52,0	28,00	14,5	6,35	41206 - 10
	95		10	52,0	28,00	6,23	41206 - 20	
		12	53,0	28,00	6,31	41206 - 30		
		16	56,0	28,00	6,56	41206 - 50		
		120	10	57,0	30,00	16,2	8,31	41207 - 10
120			12	58,0	30,00	8,39	41207 - 20	
		16	59,0	30,00	8,17	41207 - 40		
		20	66,0	36,00	9,56	41207 - 50		
		150	10	64,0	34,00	18,0	10,91	41208 - 10
	150		12	65,0	34,00	10,89	41208 - 20	
		16	68,0	34,00	11,30	41208 - 40		
		20	70,0	40,00	11,36	41208 - 50		
		185	12	72,0	39,00	20,6	15,40	41209 - 10
185			16	72,0	39,00	15,00	41209 - 30	
		20	72,0	39,00	14,20	41209 - 40		
		240	12	80,0	41,00	23,1	16,30	41210 - 10
		16	83,0	41,00	16,71	41210 - 30		
		20	85,0	41,00	17,12	41210 - 40		




Alle Maßangaben in mm, Gewicht ca. kg pro 100 Stk.  
all sizes in mm, weight approx. in kg per 100 pcs

**CU****Rohr-Kerb-Kabelschuhe****Normalausführung**

- ▶ Werkstoff: E-Cu DIN 40500
- ▶ Oberfläche: verzinkt

**Tubular copper compression lug****Standard type**

- ▶ Material: E-Cu DIN 40500
- ▶ Surface: tinned

**mit 2 Anschlusslöchern  
with 2 palm holes**

Nenngröße/rated quantity		Flanschloch palm hole	L	A	D Ø	X	Gewicht weight	Kat.-Nr. cat.-no.
mehr- drähtig multiwire	viel- u. fein- drähtig fine-strand							
16	10	2 x 6	40	11	5,5	15	0,90	43300 - 00
25	16	2 x 6	40	12	7,0	15	1,60	43304 - 00
		2 x 8	51	18		20	1,80	43306 - 00
50	35	2 x 6	60	20	10,0	20	4,10	43308 - 00
		2 x 8					4,35	43310 - 00
70	50	2 x 8	70	23	12,0	20	5,40	43320 - 00
95	70		103	26	13,5	41	13,20	43330 - 00

weitere Abmessungen möglich  
further more dimensions possible

## CU

## Rohr-Kerb-Kabelschuhe

internationale Version


- ▶ Werkstoff: E-Cu DIN 40500
- ▶ Oberfläche: verzinkt

## Tubular copper compression lug

international version

- ▶ Material: E-Cu DIN 40500
- ▶ Surface: tinned

Nenngröße/rated quantity		Flanschloch palm hole	L	A	D Ø	Gewicht weight	Kat.-Nr. cat.-no.
mm <sup>2</sup> /sqmm							
mehr- drähtig multiwire							
10		6	22,50	12,0	5,0	0,33	41720 - 21
		10	27,50	18,0		0,33	41740 - 21
16		6	24,50	12,0	5,5	0,75	41750 - 21
		10	29,50	17,5		0,74	41770 - 21
		12	33,50	19,5		0,74	41780 - 21
25		6	27,50	14,0	7,0	0,83	41790 - 21
		10	32,00	18,0		0,83	41810 - 21
		12	34,50	21,0		0,83	41820 - 21
35		8	33,0	17	8,5	1,46	41830 - 21
		10	35,5	19		1,45	41840 - 21
		12	37,5	23		1,44	41850 - 21
		16	39,0	28		1,60	41860 - 21
50		8	39,5	20	10,0	2,97	41870 - 21
		10	39,0	21		2,90	41880 - 21
		12	41,5	23		3,20	41890 - 21
		16	46,5	30		3,31	41900 - 21
70		10	44,5	24	12,0	4,10	41910 - 21
		12	46,5	24		4,20	41920 - 21
		16	49,5	28		4,40	41930 - 21
95		10	46,0	25	13,5	5,50	41940 - 21
		12	49,5	25		5,80	41950 - 21
		16	53,0	30		6,00	41960 - 21
120		10	50,0	28	15,0	6,77	42560 - 21
		12	52,0	28		6,64	42570 - 21
		16	52,0	30		6,50	42580 - 21
		20	61,0	36		7,40	42590 - 21
150		12	58,0	31	16,5	8,10	42610 - 21
		16	60,5	31		8,20	42620 - 21
		20	67,5	36		8,90	42630 - 21
185		12	63,5	35	19,0	12,30	42640 - 21
		16	64,0	35		11,40	42650 - 21
		20	69,0	39		11,70	42660 - 21
240		12	72,0	38	21,0	15,20	42670 - 21
		16				14,90	42680 - 21
		20				14,90	42690 - 21
300		16			23,5	23,90	42710 - 21
		20				23,10	42720 - 21
400		16			27,0	32,90	42740 - 21
		20				32,30	42750 - 21
500		16	90,0	50			42760 - 21
		20					42770 - 21
630		16					42780 - 21
		20					42790 - 21



Alle Maßangaben in mm, Gewicht ca. kg pro 100 Stk.  
all sizes in mm, weight approx. in kg per 100 pcs


**CU**

**Presskabelschuhe DIN 46235**

- ▶ Sechskantpressung
- ▶ Werkstoff: E-Cu DIN 40500
- ▶ Oberfläche: blankgebeizt oder verzinkt

**Tubular copper compression lug DIN 46235**

- ▶ hexagonal pressing
- ▶ Material: E-Cu DIN 40500
- ▶ Surface: bright or tinned



Nenngröße rated quantity		E Ø	L	A	D Ø	Kennziffer die-code	Anzahl der Pressungen für number of pressmarks		Gewicht weight	Katalog-Nummern cat.-no.	
RM/SM mm <sup>2</sup> sqmm	Flanschloch palm hole						schmal tight	breit wide		blank- gebeizt bright	verzinkt tinned
6	5	5,3	24	8,5	3,8	5	1	-	0,30	60000 - 00	60001 - 00
10	6	6,4	27	9,0	4,5	6	1	-	0,40	60010 - 00	60011 - 00
16	6	6,4	36	13,0	5,5	8	2	-	1,10	60020 - 00	60021 - 00
	8	8,4	36	13,0					1,05	60030 - 00	60031 - 00
	10	10,5	36	17,0					1,15	60040 - 00	60041 - 00
25	6	13,0	38	14,0	7,0	10	2	-	1,60	60060 - 00	60061 - 00
	8	8,4	38	16,0					1,60	60070 - 00	60071 - 00
	10	10,5	38	17,0					1,70	60080 - 00	60081 - 00
	12	13,0	38	19,0					1,70	60090 - 00	60091 - 00
35	8	8,4	42	17,0	8,2	12	2	-	2,70	60110 - 00	60111 - 00
	10	10,5	19,0	2,65					60120 - 00	60121 - 00	
	12	13,0	21,0	2,65					60130 - 00	60131 - 00	
50	8	8,4	52	20,0	10,0	14	3	-	4,50	60150 - 00	60151 - 00
	10	10,5	22,0	4,40					60160 - 00	60161 - 00	
	12	13,0	24,0	4,30					60170 - 00	60171 - 00	
	16	17,0	28,0	4,50					60180 - 00	60181 - 00	
70	10	10,5	55	24,0	11,5	16	3	-	6,20	60190 - 00	60191 - 00
	12	13,0	24,0	6,10					60200 - 00	60201 - 00	
	16	17,0	30,0	6,30					60210 - 00	60211 - 00	
95	10	10,5	65	28,0	13,5	18	4	2	8,90	60220 - 00	60221 - 00
	12	13,0	65	28,0					8,90	60230 - 00	60231 - 00
	16	17,0	65	32,0					8,90	60240 - 00	60241 - 00
120	12	13,0	70	32,0	15,5	20	4	2	11,70	60260 - 00	60261 - 00
	16	17,0	32,0	11,70					60270 - 00	60271 - 00	
	20	21,0	38,0	12,20					60280 - 00	60281 - 00	
150	12	13,0	78	34,0	17,0	22	4	2	16,50	60290 - 00	60291 - 00
	16	17,0	34,0	16,50					60300 - 00	60301 - 00	
	20	21,0	40,0	17,30					60310 - 00	60311 - 00	
185	12	13,0	82	37,0	19,0	25	5	2	20,30	60315 - 00	60316 - 00
	16	17,0	37,0	19,40					60320 - 00	60321 - 00	
	20	21,0	40,0	19,00					30330 - 00	60331 - 00	
240	12	13,0	92	42,0	21,5	28	-	2	19,00	30335 - 00	60336 - 00
	16	17,0	42,0	28,70					60340 - 00	60341 - 00	
	20	21,0	45,0	27,90					60350 - 00	60351 - 00	
300	16	17,0	100	48,0	24,5	32	-	2	37,40	60360 - 00	60361 - 00
	20	21,0	36,40	60370 - 00					60371 - 00		
400	16	17,0	115	55,0	27,5	38	-	3	68,50	60380 - 00	60381 - 00
	20	21,0	67,50	60390 - 00					60391 - 00		
500	20	21,0	125	60,0	31,0	42	-	3	81,00	60410 - 00	60411 - 00
625	20	21,0	135	63,5	34,5	44	-	3	81,00	60420 - 00	60421 - 00
800	20	21,0	165	75,0	40,0	52	-	3	150,00	60430 - 00	60431 - 00

## CU


## Presskabelschuhe

- ▶ längsdicht
- ▶ Werkstoff: E-Cu DIN 40500
- ▶ Oberfläche: blankgebeizt oder verzinkt

## Tubular copper compression lug

- ▶ longitudinally sealed
- ▶ Material: E-Cu DIN 40500
- ▶ Surface: bright or tinned

Leiterquerschnitt in mm <sup>2</sup> conductor cross section in sqmm	Flansch- loch palm hole	Abmessungen in mm dimension in mm				Kennziffer die-code	Anzahl der Pressungen für number of pressmarks		Gewicht in kg weight	Katalog-Nummern cat.-no.	
		E Ø	L	A	D Ø		schmal tight	breit wide		blank- gebeizt bright	verzinkt tinned
RM/SM											
25	6	6,5	38	24,0	7,0	10	2	1	2,4	64712 - 00	64713 - 00
25	8	8,5								64714 - 00	64715 - 00
25	10	10,5								64719 - 00	64720 - 00
25	12	13,0								64724 - 00	64725 - 00
35	6	6,5	40	24,2	8,2	12	2	1	3,3	64729 - 00	64730 - 00
35	8	8,5								64734 - 00	64735 - 00
35	10	10,5								64739 - 00	64740 - 00
35	12	13,0								64744 - 00	64745 - 00
50	8	8,5	45	24,0	10,0	14	3	1	4,2	64749 - 00	64750 - 00
50	10	10,5								64754 - 00	64755 - 00
50	12	13,0								64759 - 00	64760 - 00
70	10	10,5	48	24,0	11,5	16	3	1	6,4	64764 - 00	64765 - 00
70	12	13,0								64769 - 00	64770 - 00
70	16	17,0								64774 - 00	64775 - 00
95	10	13,0	57	26,0	13,5	18	4	2	8,8	64779 - 00	64780 - 00
95	12	17,0								64784 - 00	64785 - 00
95	16	13,0								64789 - 00	64790 - 00
120	12	17,0	58	30,0	15,5	20	4	2	12,2	64809 - 00	64810 - 00
120	16	13,0								64819 - 00	64820 - 00
150	12	17,0	56	30,0	17,0	22	4	2	15,6	64829 - 00	64830 - 00
150	16	21,0								64839 - 00	64840 - 00
185	12	13,0	68	30,0	19,0	25	5	2	19,1	64859 - 00	64860 - 00
185	16	17,0								64869 - 00	64870 - 00
185	20	21,0	75	34,0						64879 - 00	64880 - 00
240	12	17,0	68	30,0	21,5	28	-	2	22,1	64889 - 00	64890 - 00
240	16	21,0								64899 - 00	64900 - 00
240	20	17,0	75	34,0						64909 - 00	64910 - 00
300	16	17,0	83	38,0	24,5	32	-	2	36,5	64919 - 00	64920 - 00
300	20	21,0	90							64929 - 00	64930 - 00
400	16	17,0	96	43,0	26,0	38	-	3	50,8	64939 - 00	64940 - 00
400	20	21,0								64949 - 00	64950 - 00
500	16	17,0	114	43,0	29,0	42	-	3	77,9	64959 - 00	64960 - 00
500	20	21,0								64969 - 00	64970 - 00




Alle Maßangaben in mm, Gewicht ca. kg pro 100 Stk.  
all sizes in mm, weight approx. in kg per 100 pcs

**AL****Presskabelschuhe**

- ▶ Werkstoff: Al 99,5 DIN 40501
- ▶ Oberfläche: blankgebeizt
- ▶ Sechskantpressung

**Tubular Aluminium compression lug**

- ▶ Material: Al 99,5 DIN 40501
- ▶ Surface: bright
- ▶ hexagonal pressing



Nenngröße rated quantity		Flansch- loch palm hole	E Ø	L	A	D Ø	Kennziffer die-code	Anzahl der Pressungen für number of pressmarks		Gewicht weight	Kat.-Nr. cat.-no.
mm <sup>2</sup> sqmm	RM/SM							SE	schmal tight		
25	35	8	8,5	60	18,0	6,8	12	4	2	1,60	60500 - 00
		10	10,5								60510 - 00
35	50	10	10,5	67	20,5	8,0	14	5	3	2,20	60520 - 00
		12	13,0								60530 - 00
50	70	10	10,5	70	24,5	10,0	16	5	3	2,90	60540 - 00
		12	13,0								60550 - 00
70	95	10	10,5	81	27,5	11,5	18	6	3	4,50	60560 - 00
		12	13,0								60570 - 00
95	120	12	13,0	93	34,0	13,5	22	6	3	8,20	60580 - 00
		16	17,0								60590 - 00
120	150	12	13,0	91	32,0	15,0	22	6	3	7,70	60600 - 00
		16	17,0								60610 - 00
		20	21,0								60620 - 00
150	185	12	13,0	108	35,0	16,5	25	6	3	10,70	60630 - 00
		16	17,0								60640 - 00
		20	21,0								60650 - 00
185	240	16	17,0	104	41,0	18,5	28	6	3	13,30	60660 - 00
		20	21,0								60670 - 00
240	300	16	17,0	115	46,0	21,5	32	8	3	19,00	60680 - 00
		20	21,0								60690 - 00
300	-	16	17,0	121	53,0	24,5	34	8	3	25,00	60700 - 00
		20	21,0								60710 - 00
400	-	16	17,0	165	58,0	28,0	42	-	4	45,00	60720 - 00
		20	21,0								60725 - 00
500	-	16	17,0	185	64,0	31,0	46	-	4	54,00	60730 - 00
		20	21,0								60740 - 00
630	-	20	21,0	195	72,0	35,0	52	-	4	72,00	60750 - 00
800	-	20	21,0	230	81,0	40,0	58	-	5	86,00	60755 - 00
1000	-	20	21,0	230	85,0	44,0	60	-	5	93,00	

Alle Maßangaben in mm, Gewicht ca. kg pro 100 Stk.  
all sizes in mm, weight approx. in kg per 100 pcs

## AL


## Presskabelschuhe DIN 46329

- fließgepresste Ausführung
- ▶ Werkstoff: Al 99,5 DIN 40501
- ▶ Sechskantpressung
- ▶ Oberfläche: blank/verzinkt

## Aluminium compression lug DIN 46329

- extruded type
- ▶ Material: Al 99,5 DIN 4050
- ▶ hexagonal pressing
- ▶ surface: bright/tinned

Nenngröße rated quantity		Flansch- loch palm hole	E Ø	L	A	D Ø	Kennziffer die-code	Anzahl der Pressungen für number of pressmarks		Gewicht weight	Katalog-Nummern cat.-no.	
mm <sup>2</sup> sqmm								schmal tight	breit wide		blank bright	verzinkt tinned
RM/SM	RE/SE											
35	50	10	10,5	62		8,0	14	5	3	2,25	63420 - 00	63421 - 00
		12	13,0								2,20	63440 - 00
50	70	10	10,5	62		9,8	16	5	3	2,70	63440 - 00	63441 - 00
		12	13,0								2,60	63450 - 00
70	95	10	10,5	72		11,2	18	6	3	4,10	63460 - 00	63461 - 00
		12	13,0								4,00	63470 - 00
95	120	10	10,5	75		13,2	22	6	3	6,70	63480 - 00	63481 - 00
		12	13,0								6,50	63490 - 00
120	150	12	13,0	80	30	14,7	22	6	3	6,40	63500 - 00	63501 - 00
		16	17,0								6,30	63510 - 00
150	185	10	10,5	90	30	16,3	25	7	3	8,00	63520 - 00	63521 - 00
		12	13,0								7,80	63530 - 00
185	240	16	17,0	91	30	18,3	28	7	3	7,70	63540 - 00	63541 - 00
		10	10,5								11,30	63550 - 00
240	300	12	13,0	103	38	21,0	32	8	3	10,60	63560 - 00	63561 - 00
		16	17,0								9,80	63570 - 00
300	-	20	21,0	103	38	23,3	34	8	3	11,30	63580 - 00	63581 - 00
		12	13,0								16,20	63580 - 00
400	-	16	17,0	116	38	26,0	38	-	4	15,50	63590 - 00	63591 - 00
		20	21,0								14,70	63600 - 00
500	-	12	13,0	122	44	29,0	44	-	4	18,00	63610 - 00	63611 - 00
		16	17,0								17,60	63620 - 00
500	-	20	21,0	122	44	29,0	44	-	4	17,30	63630 - 00	63631 - 00
		12	13,0								40,80	63634 - 00
500	-	16	17,0	122	44	29,0	44	-	4	40,40	63640 - 00	63641 - 00
		20	21,0								40,00	63650 - 00
500	-	12	13,0	122	44	29,0	44	-	4	43,60	63654 - 00	63655 - 00
		16	17,0								43,20	63660 - 00
500	-	20	21,0	122	44	29,0	44	-	4	42,80	63670 - 00	63671 - 00



Alle Maßangaben in mm, Gewicht ca. kg pro 100 Stk.  
all sizes in mm, weight approx. in kg per 100 pcs

**AL****Presskabelschuhe**


fließgepresste Ausführung für Aluminiumleiter, sektorförmig

- ▶ Werkstoff: Al 99,5 DIN 40501
- ▶ Oberfläche: blank
- ▶ Sechskantpressung

**Tubular Aluminium compression lug**

for aluminium cables, sector shaped

- ▶ Material: Al 99,5 DIN 40501
- ▶ Surface: bright
- ▶ hexagonal pressing



mm <sup>2</sup> sqmm		Flansch- loch palm hole	E Ø	L	A	Kennziffer die-code	Anzahl der Pressungen für number of pressmarks		Gewicht weight	Kat.-Nr. cat.-no.
SM	SE						schmal tight	breit wide		
35	50	8	8,5	68	25	16	5	3	2,50	63343 - 00
		10	10,5						2,40	63344 - 00
50	70	8	8,5	68	25	18	5	3	3,00	63346 - 00
		10	10,5						2,95	63347 - 00
		12	13,0						2,90	63348 - 00
70	95	8	8,5	81	25	22	6	3	4,50	63350 - 00
		10	10,5						4,45	63351 - 00
		12	13,0						4,40	63352 - 00
95	120	10	10,5	82	30	22	6	3	7,40	63355 - 00
		12	13,0						7,30	63356 - 00
		16	17,0						7,20	63358 - 00
120	150	10	10,5	90	30	25	6	3	7,10	63361 - 00
		12	13,0						7,05	63362 - 00
		16	17,0						7,00	63364 - 00
150	185	10	10,5	92	30	28	7	3	8,80	63368 - 00
		12	13,0						8,60	63369 - 00
		16	17,0						8,50	63371 - 00
185	240	10	10,5	94	30	32	7	3	12,50	63373 - 00
		12	13,0						16,20	63374 - 00
		16	17,0						15,50	63375 - 00
240	300	12	13,0	105	38	38	8	3	24,00	63377 - 00
		16	17,0						24,00	63378 - 00
		20	21,0						24,00	63379 - 00

Alle Maßangaben in mm, Gewicht ca. kg pro 100 Stk.  
all sizes in mm, weight approx. in kg per 100 pcs





**AL/CU****Presskabelschuhe**

- ▶ Sechskantpressung
- ▶ Werkstoff: Al 99,5 DIN 40501  
E-Cu DIN 40500
- ▶ Oberfläche: blankgebeizt

**Tubular bimetallic compression lug**

- ▶ Hexagonal pressing
- ▶ Material: Al 99,5 DIN 40501  
E-Cu DIN 40500
- ▶ Surface: bright

Nenngröße rated quantity mm <sup>2</sup> sqmm		Flansch- loch palm hole	E Ø	L	A	D Ø	Kennziffer die-code	Anzahl der Pressungen für number of pressmarks		Gewicht weight	Kat.-Nr. cat.-no.
								schmal tight	breit wide		
RM/SM	SE										
25		8	8,4	61	23	6,8	12	4	2	3,20	61240 - 00
		10	10,5							3,10	61241 - 00
		12	13,0							3,00	61242 - 00
35	50	10	10,5	71	23	8,0	14	5	3	3,80	61245 - 00
		12	13,0							3,60	61246 - 00
50	70	10	10,5	72	23	9,8	16	5	3	4,30	61250 - 00
		12	13,0							4,10	61251 - 00
70	95	10	10,5	82	26	11,2	18	6	3	5,30	61255 - 00
		12	13,0							5,10	61256 - 00
95	120	12	13,0	85	30	13,2	22	6	3	9,90	61261 - 00
		16	17,0							10,50	61262 - 00
120	150	12	13,0	87	30	14,7		6	3	10,60	61266 - 00
		16	17,0							10,00	61267 - 00
150	185	12	13,0	104	36	16,3	25	7	3	16,20	61270 - 00
		16	17,0							15,70	61271 - 00
185	240	12	13,0	105	36	18,3	28	7	3	21,80	61275 - 00
		16	17,0							21,40	61276 - 00
240	300	12	13,0	120	36	21,0	32	8	3	29,80	61280 - 00
		16	17,0							29,00	61281 - 00
300		16	17,0	120	38	24,5	34	8	3	40,70	61285 - 00
		20	21,0							39,50	61286 - 00



Alle Maßangaben in mm, Gewicht ca. kg pro 100 Stk.  
all sizes in mm, weight approx. in kg per 100 pcs

**AL/CU****Presskabelschuhe**


für Aluminiumleiter, sektorförmig

- ▶ Sechskantpressung
- ▶ Werkstoff: Al 99,5 DIN 40501  
Kupfer DIN 40500
- ▶ Oberfläche: blank

**Tubular bimetallic compression lug**

for aluminium cables, sector shaped

- ▶ Hexagonal pressing
- ▶ Material: Al 99,5 DIN 40501  
E-Cu DIN 40500
- ▶ Surface: bright



mm <sup>2</sup> sqmm		Flanschloch palm hole	E Ø	L	A	Kennziffer die-code	Anzahl der Pressungen für number of pressmarks		Gewicht weight	Kat.-Nr. cat.-no.
SM	SE						schmal tight	breit wide		
35	50	10	10,5	81	22,5	16	5	3	4,20	61610 - 00
		12	13,0						4,00	61611 - 00
50	70	10	10,5	92	26,0	18	5	3	4,70	61314 - 00
		12	13,0						4,50	61615 - 00
70	95	10	10,5	97	30,5	22	6	3	5,80	61618 - 00
		12	13,0						5,60	61619 - 00
95	120	12	13,0	98	32,5	22	6	3	10,90	61321 - 00
		16	17,0						10,80	61323 - 00
120	150	12	13,0	118	35,0	25	6	3	11,70	61326 - 00
		16	17,0						11,50	61328 - 00
150	185	12	13,0	119	40,0	28	7	3	17,90	61330 - 00
		16	17,0						17,80	61332 - 00
185	240	12	13,0	135	44,5	32	7	3	24,00	61335 - 00
		16	17,0						23,50	61337 - 00
240	300	12	13,0			38	8	3	32,80	61340 - 00
		16	21,0						32,30	61342 - 00

Alle Maßangaben in mm, Gewicht ca. kg pro 100 Stk.  
all sizes in mm, weight approx. in kg per 100 pcs


**AL/CU****Presskabelschuhe mit Kupferauge**

- ▶ Sechskantpressung
- ▶ Werkstoff: Al 99,5 DIN 40501  
E-Cu DIN 40500
- ▶ Oberfläche: blankgebeizt

**Bimetallic tubular compression lug with copper eye**

- ▶ Hexagonal pressing
- ▶ Material: Al 99,5 DIN 40501  
E-Cu DIN 40500
- ▶ Surface: bright

Nenngröße rated quantity mm <sup>2</sup> sqmm		Flansch- loch palm hole	E Ø	L	A	D Ø	Kennziffer die-code	Anzahl der Pressungen für number of pressmarks		Gewicht weight	Kat.-Nr. cat.-no.
								schmal tight	breit wide		
RM/SM	SE										
25		8	8,5	60,5	16	6,8	12	4	2	2,10	61000 - 00
		10	10,5		20						61010 - 00
35	50	10	10,5	67,0	20	8,0	14	5	3	3,00	61020 - 00
		12	13,0		25						61030 - 00
50	70	10	10,5	70,5	20	10,0	16	5	3	3,80	61040 - 00
		12	13,0		25						61050 - 00
70	95	10	10,5	81,0	22	11,5	18	6	3	5,80	61060 - 00
		12	13,0		27						61070 - 00
95	120	12	13,0	93,5	27	13,5	22	6	3	10,20	61080 - 00
		16	17,0		31						61090 - 00
120	150	12	13,0	91,0	27	15,0	22	6	3	9,80	61100 - 00
		16	17,0		31						61110 - 00
150	185	12	13,0	108,5	27	16,5	25	6	3	12,90	61120 - 00
		16	17,0		31						61130 - 00
185	240	20	21,0	104,0	35	18,5	28	7	3	16,00	61140 - 00
		12	13,0		31						61145 - 00
240	300	16	17,0	115,0	35	21,5	32	7	3	21,00	61150 - 00
		20	21,0		35						61160 - 00
300	-	16	17,0	121,0	38	24,5	34	7	3	33,00	61165 - 00
		20	21,0		40						61170 - 00
											61180 - 00
											61180 - 00
											61190 - 00
											61200 - 00



Alle Maßangaben in mm, Gewicht ca. kg pro 100 Stk.  
all sizes in mm, weight approx. in kg per 100 pcs